



Installation guide

Thermostatic expansion valve

Type TCBE / TCCE / TCAE








068R955Z



068R955Z

Standard refrigerants:
See product label

Max. working pressure:
PS / MWP: 45.5 bar / 660 psig

Max. test pressure
P_{test} = 45.5 bar / 660 psig

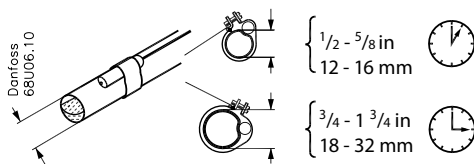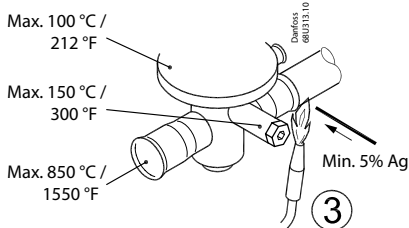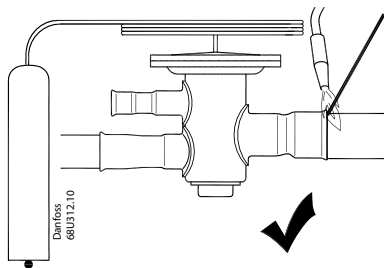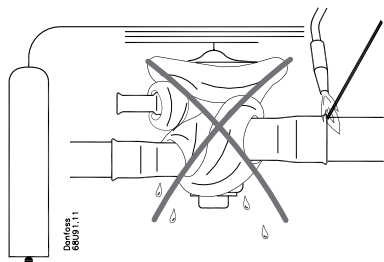

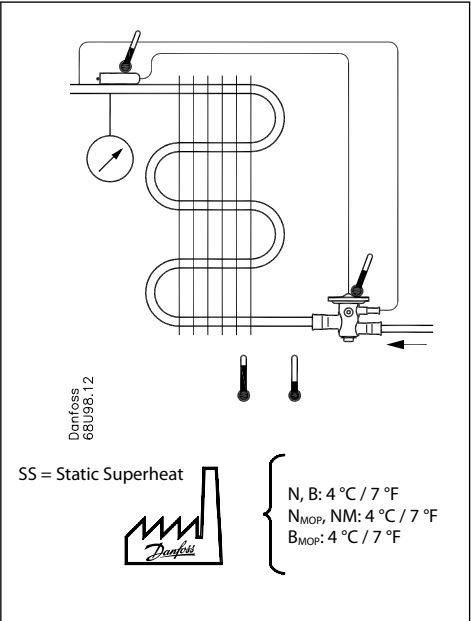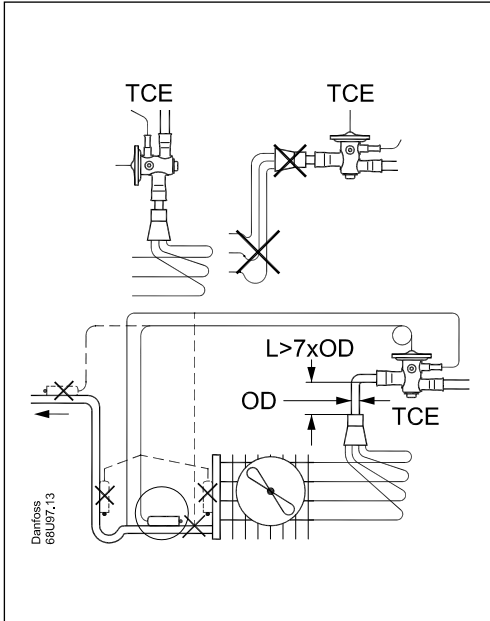

R22/R407C	R134a	R404A/R507	R410A	ΔSS 1 ×
-	N	-	-	1 °C (1.8°F)
N	NM	N,B	N,B	1.5 °C (2.7°F)
NM,B	-	NM	NM	2 °C (3.6°F)

Temperature ranges:
 N = -40 - 10 °C / -40 - 60 °F
 NM = -40 - -5 °C / -40 - 25 °F
 B = -60 - -25 °C / -75 - -15 °F