


Fact sheet

Termix VMTD-MIX-B

Direct substation for flats, single and multi-family houses with up to 7 apartments

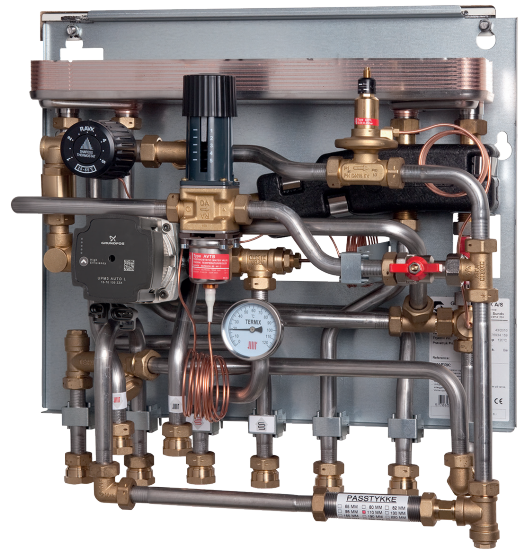

Application

The Termix VMTD MIX-B is a complete solution with built-in water heater and heating system with differential pressure control and mixing loop. The Termix VMTD MIX-B is applicable for single-family houses and for decentralized systems in multi-family houses.

District heating (DH)

The substation is prefabricated with a differential pressure controller, fitting piece and sensor pockets for insertion of a heat meter as well as strainers and ball valves. Furthermore the substation is delivered with a mixing loop including pump, controls and non-return valve.

Heating (HE)

The heating circuit is designed for direct connection. The differential pressure controller sets the optimum operation conditions for radiator thermostats in order to enable individual temperature control in each room. The mixing loop creates a suitable temperature level e.g. for floor heating. In order to enable a time-dependent temperature control program, a zone valve

with actuator and a room thermostat can be included as an option.

Domestic hot water (DHW)

The domestic hot water is prepared in the heat exchanger and the temperature is regulated with a thermostatic control valve. The patented sensor accelerator accelerates the closing of the Danfoss AVTB valve and protects the heat exchanger against overheating and lime scale formation. The heat exchanger cools the DH water very efficiently, thereby creating a very good operating economy. The sensor accelerator and AVTB valve also works as a bypass keeping the house supply line warm. This shortens the waiting periods during summer when the heating system is in reduced operation. The sensor accelerator helps to ensure a stable hot water temperature regardless of varying loads, flow temperatures and differential pressure without the need for readjusting the valve.

Options

The substation can be supplied with a (built-in) non-return valve and safety

valve mounted in the cold water supply. The substation can also be supplied with a thermostatic circulation valve.


Construction

All pipes are made of stainless steel. The connections are made by nuts and gaskets. The Termix VMTD-F-B can be delivered with white-lacquered steel cover in modern design.

FEATURES AND BENEFITS

- Substation for DH and decentralized systems
- Direct heating and DHW temperature regulation with a thermostatic control valve
- Capacity: 33 – 75kW for DHW
- DHW in sufficient quantity
- Operates independently of differential pressure and flow temperature
- Minimum space required for installation
- Pipes and plate heat exchanger made of stainless steel
- Minimized risk of lime scale and bacteria formation

CIRCUIT DIAGRAM - EXAMPLE

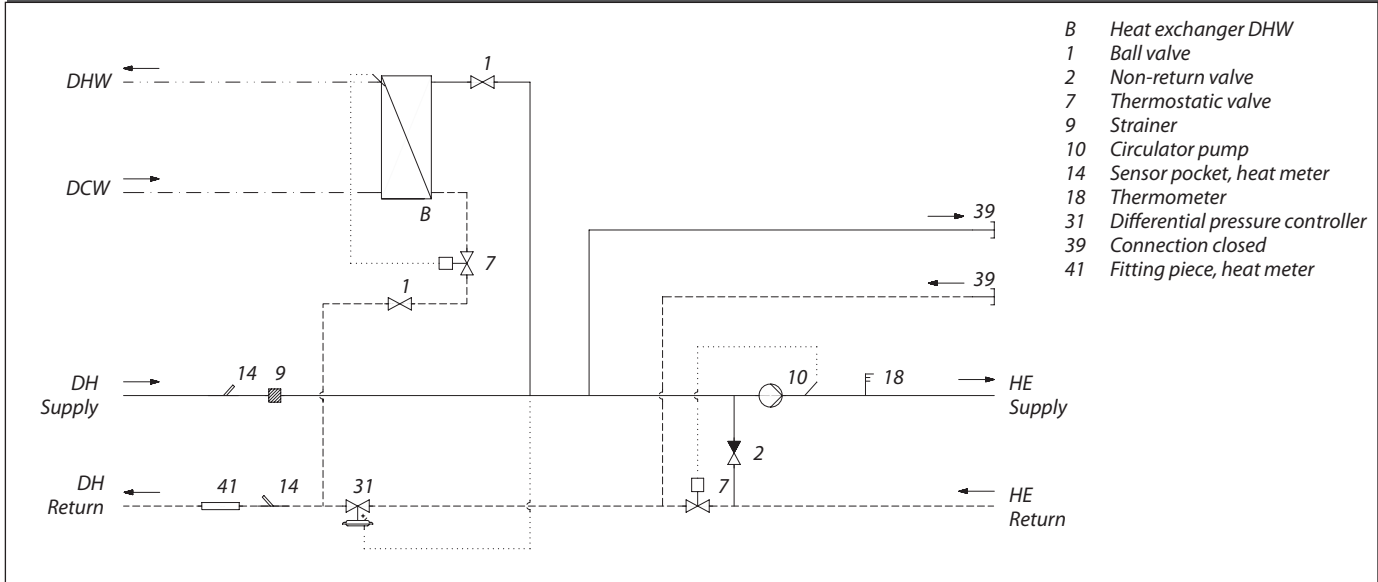

- B Heat exchanger DHW
- 1 Ball valve
- 2 Non-return valve
- 7 Thermostatic valve
- 9 Strainer
- 10 Circulator pump
- 14 Sensor pocket, heat meter
- 18 Thermometer
- 31 Differential pressure controller
- 39 Connection closed
- 41 Fitting piece, heat meter

Technical parameters:

Nominal pressure: PN 16
 DH supply temperature: $T_{max} = 120\text{ }^{\circ}\text{C}$
 DCW static pressure: $P_{min} = 0,5\text{ bar}$
 Brazing material (HEX): Copper

Weight excl. cover: 25 kg
 (incl. packing)

Cover: White-lacquered steel sheet

Dimensions (mm):

Without cover: H550 x W530 x D280
 With cover: H550 x W540 x D360

Connections:


1. District heating (DH) supply
2. District heating (DH) return
3. Floor heating (FH) supply
4. Floor heating (FH) return
5. Domestic hot water (DHW)
6. Domestic cold water (DCW)
7. Heating (HE) supply
8. Heating (HE) return

Connections sizes:

DH + FH + HE: $G\frac{3}{4}$ " (int. thread)
 DCW + DHW: $G\frac{1}{2}$ " (int. thread)

Options:

- Booster pump (increases DH flow)
- White-lacquered steel cover
- Safety valve and non-return valve (10 bar)
- Safety valve with thermostatic circulation set
- Thermostatic circulation set
- Pressure equalizer (GTU)
- Room thermostat
- Zone valve with actuator
- Air screw (DH supply)

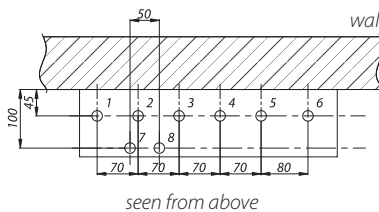

CAPACITY, WEIGHT AND DIMENSIONS

Substation type	DHW capacity [kW]	Supply flow primary [°C]	Return flow primary [°C]	DCW/DHW [°C]	Pressure loss primary [kPa]	Flow rate secondary [l/h]
VMTD-1	33	60	20	10/45	25	810
	40	70	20	10/50	25	858
VMTD-2	50	60	20	10/45	40	1228
	58	70	20	10/50	40	1247
VMTD-3	65	60	20	10/45	40	1597
	75	70	20	10/50	40	1612

Gemina Termix A/S · Member of the Danfoss Group · Navervej 15-17 · DK-7451 Sunds · Denmark
 Tel.: +45 9714 1444 · Fax: +45 9714 1159 · mail@termix.dk · www.heating.danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.